

**FOO 14**  
**FOOD**

## Analysis of Butter Fat on HT5

### KEYWORDS:


Micro wax's

Polywax's

Wax's

### ANALYSIS OF BUTTER FAT

Part No.: 054661  
Phase: HT5, 0.1µm  
Column: 6m x 0.53mm I.D.  
(Aluminum Clad)  
Initial Temp.: 200°C, 0 min  
Program Rate: 10°C/min  
Final Temp.: 370°C, 5 min  
Carrier Gas: H<sub>2</sub>, 2 psi  
Detector: F.I.D.  
Sensitivity: 32 x10<sup>-12</sup>AFS  
Injection Mode: On-column

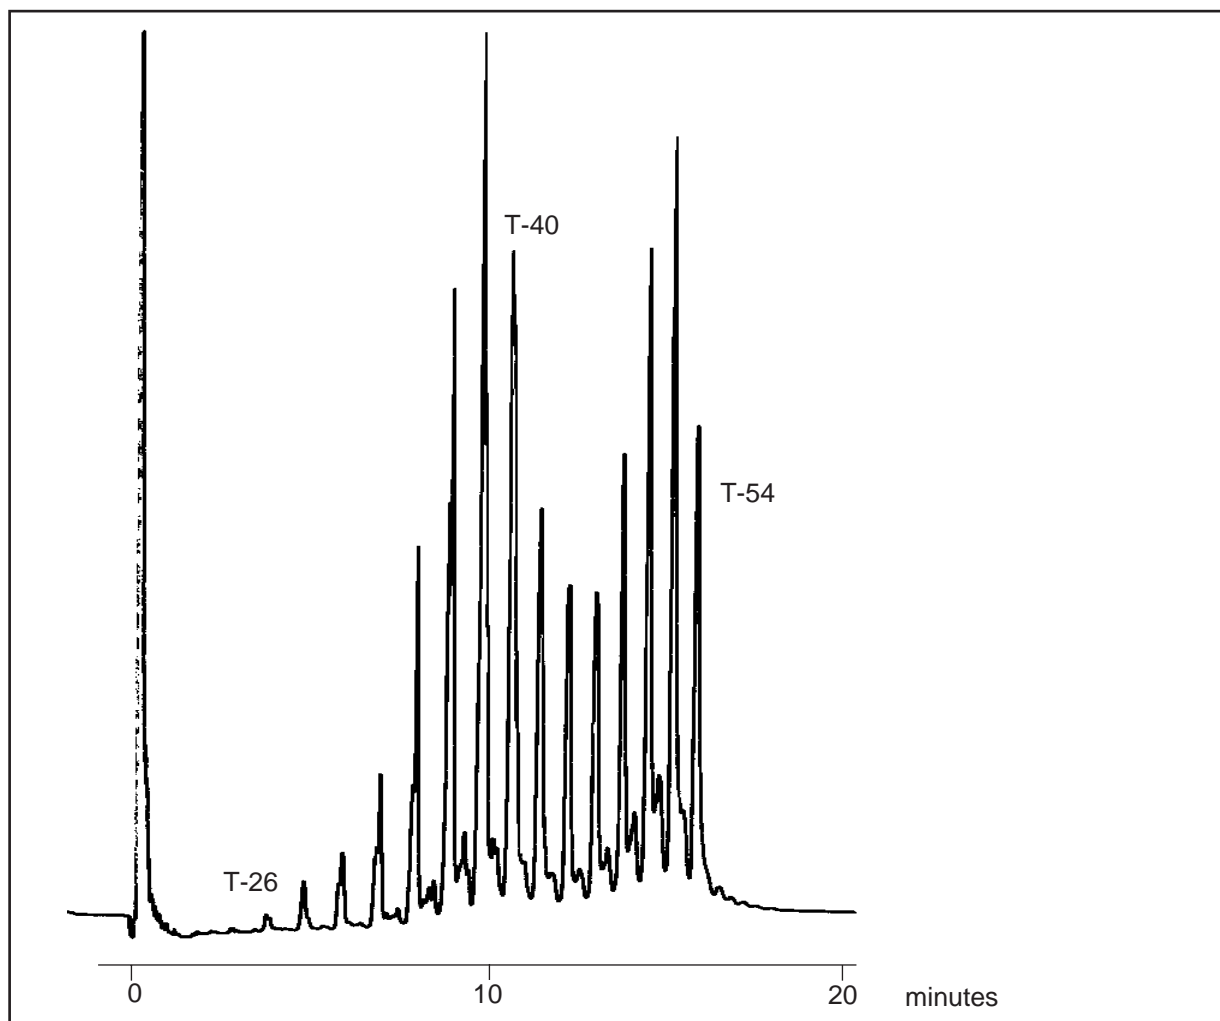

visit [www.sge.com](http://www.sge.com) or contact our technical Customer Support Team on: [techsupport@sge.com](mailto:techsupport@sge.com)

SGE International Pty. Ltd.  
email:support@sge.com

SGE Incorporated (USA)  
email:usa@sge.com

SGE (France) Sarl  
email:france@sge.com

SGE Deutschland GmbH  
email:germany@sge.com

SGE Japan Inc.  
email:sgejpn@itjit.ne.jp

SGE Australia Pty. Ltd.  
email:sales@sge.com

SGE Europe Ltd. (UK)  
email:uk@sge.com

SGE (Italia) Srl.  
email:sge.italia@tin.it

SGE China Service Centre  
email:sge@bj.col.com.cn

SGE India  
email:sgeindia@bom4.vsnl.net.in