


Connections | HPLC Unions

Perfect Connections, Every Time PEEK

HPLC Unions are specifically designed and precision engineered for use in capillary LC. The ideal way to avoid any void or dead volume in a connection is to achieve a faultless butt connection.

Features and benefits

- Zero dead volume design for no peak dispersion.
- Easy to use.
- Complete versatility - allows connection to the same or different sized tubing.
- Available in PEEK and stainless steel.
- Stainless steel unions can be finger tightened or tightened with a 3/16" wrench for high-pressure applications.
- PEEK unions can be finger tightened. They are slightly larger than stainless steel unions but also lighter - less stress on your tubing.

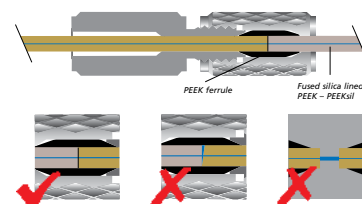

Recommended applications

ProteCol® Unions and reusable PEEK ferrules allow you to connect any combination of:

- 1/32" PEEKsil®.
- 1/16" PEEKsil.
- 0.36 mm fused silica tubing.

Use for connecting guard or trap columns to analytical columns, or for bypassing the analytical column.

Product specifications

ProteCol unions are available in either stainless steel or PEEK (for all sizes). All use the same range of reusable PEEK ferrules.

Pressure Rating 5000 psi for the stainless steel unions, 2175 psi for the PEEK unions.

Connections | HPLC Unions continued

ProteCol Stainless Steel Unions

| Description |
|--------------------|
| 0.36 mm to 0.36 mm |
| 1/16" to 0.36 mm |
| 1/16" to 1/16" |
| 1/16" to 1/32" |
| 1/32" to 0.36 mm |
| 1/32" to 1/32" |

ProteCol PEEK Unions

| Description |
|--------------------|
| 0.36 mm to 0.36 mm |
| 1/16" to 0.36 mm |
| 1/16" to 1/16" |
| 1/16" to 1/32" |
| 1/32" to 0.36 mm |
| 1/32" to 1/32" |

ProteCol PEEK Ferrules

| Description |
|--------------------|
| 0.36 mm to 0.36 mm |
| 1/16" to 0.36 mm |
| 1/16" to 1/16" |
| 1/16" to 1/32" |
| 1/32" to 0.36 mm |
| 1/32" to 1/32" |

For more information about this product visit www.trajanscimed.com or contact techsupport@trajanscimed.com